DUCT FANS




BKEF-T

AC KITCHEN EXHAUST FANS Forward Curved

The unit has a swing-out door for easy installation and service. The direction of the door opening can easily be changed from left to right. Fan connection and anti-vibration mountings are added to izolation bottom frame. The casing is manufactured from double-skinned galvanised sheet steel and insulated with 50 mm mineral wool. Up to 120 degrees hot air can be transfered. Low noise levels.

Technical Drawings




MATERIAL

INSULATION CLASS MAX. HAVA TAŞINIMI DIRECTIVE SPEED CONTROL

APPLICATION AREAS


- : The housing and impeller are galvanized sheet steel.
- : Class F
- : 120°C
- : EN 60335-1, EN 60335-2-80
- : Speed can be adjusted using an optional controller.
- : The BKEF-T fan series are perfect to use in residential, commercial, and industrial environments, especially where hot air and smoke is needed to be transferred. They are widely used in industrial kitchens, cafes and restaurants, as well as gymnasiums, shopping centers, hospitals, factories, offices etc.








TYPE	Α	В	С	D	Е	F	G	Н	I
BKEF-T 160	372	345	202	480	470	227	160	127	115
BKEF-T 180	409	378	213	512	500	227	190	132	130
BKEF-T 200	445	409	224	544	500	266	210	142	143
BKEF-T 225	492	452	226	586	500	282	218	142	163
BKEF-T 250	535	490	246	625	550	316	254	162	179
BKEF-T 280	590	540	250	705	600	316	284	167	203
BKEF-T 315	650	600	272	758	650	405	333	188	225
BKEF-T 355	730	656	310	820	650	405	340	210	256



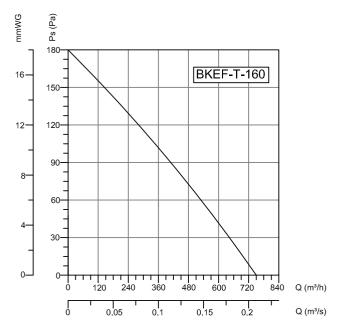







TYPE	< VOLTAGE	H FREQUENCY	AN POWER	(E) CURRENT	d/d	m³/h	B SOUND PRESSURE LEVEL	MEIGHT
BKEF-T 160M / BKEF-T 160T	230/380	50	0,18	1,5/0,6	1330	750	45	25
BKEF-T 180M / BKEF-T 180T	230/380	50	0,18	1,5/0,6	1330	1350	45	29
BKEF-T 200M / BKEF-T 200T	230/380	50	0,55	3,3/1,5	1360	1750	50	40
BKEF-T 225M / BKEF-T 225T	230/380	50	0,75	4,6/2	1360	2250	52	43
BKEF-T 250M / BKEF-T 250T	230/380	50	1,5	9,3/3,5	1360	3500	55	52
BKEF-T 280M / BKEF-T 280T	230/380	50	1,5	9,3/3,5	1330	4200	56	63
BKEF-T 315M / BKEF-T 315T	230/380	50	3	19/6,45	1330	5000	58	78
BKEF-T 355T	380	50	3	6,9	900	6000	60	85

DUCT FANS

