

REDUKCJA SEGMENTOWA




WYKONANIE

- stal ocynkowana

WYMIARY

ØD [mm]	Ød [mm]	L [mm]	Opakowanie [szt./opak.]
160	100	120	1
160	125	70	1
200	100	190	1
200	125	140	1
200	160	80	1
250	125	240	1
250	160	170	1
250	200	100	1
315	160	290	1
315	200	220	1
315	250	130	1
355	160	370	1
355	200	290	1
355	250	200	1
355	315	80	1

RCL

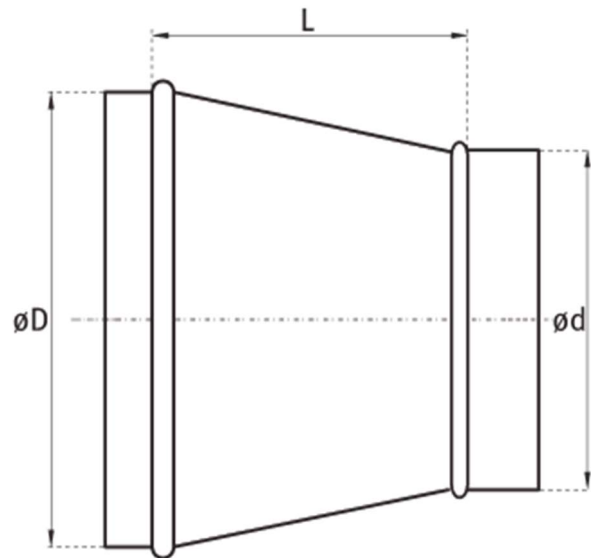

CHARAKTERYSTYKA

- segmenty łączone zamkiem blacharskim
- łączenie okrągłych kanałów wentylacyjnych o różnych średnicach (nypel-nypel)

ØD [mm]	Ød [mm]	L [mm]	Opakowanie [szt./opak.]
400	250	280	1
400	315	160	1
400	355	90	1
450	315	260	1
450	355	180	1
450	400	100	1
500	355	280	1
500	400	190	1
500	450	100	1
630	450	340	1
630	500	250	1
630	560	140	1
560	400	300	1
560	450	210	1
560	500	120	1